



Purchasing Department
101 Stadium Way, Phelan CA 92371
(760)-868-5817

RFP #18/19-03

Addendum #1

Internal Connections/Cabling for Vista Verde
Elementary and Heritage School
E-Rate Year 22 (2019/2020) Category 2

**MANDATORY RFP/BID JOB-WALK: Monday November 19,
2018 @7:30am**
Technology/District Office
4075 Nielson Road
Phelan, CA 92371

Advertised November 1 & November 8, 2018

RFP/BID Due Date: **January 8, 2019 no later than 2:00 P.M.**

Delivery to: Snowline Joint Unified School District
Purchasing Department
101 Stadium Way
Phelan, CA 92371

EVENT	DATE
RFP Publication & Legal Ad	November 1 and November 8
Post Form 470	November 1, 2018
Mandatory JOB WALK	November 19, 2018 @ 7:30 AM PST
RFI-submittal of written questions/clarifications. Email to: karen_stevens@snowlineschools.com	Deadline for RFI submittal: November 23, 2018

Subject: RFP 18/19-03 Due Date Change	
Requests for Proposals Due	January 08, 2019 on or before 2:00pm
RFP's Review & Selection Process	January 10 – January 31, 2019
Board Approval (Earliest Possible)	February 12 th , 2019

The District reserves the right to reject any or all Request for Proposals, waive defects or informalities in Request for Proposals and to make awards as deemed to be in the Districts best interest. If awarded, awards will be made to the responsible, responsive, and lowest priced proposal based on the selection criteria set forth within this RFP.

Please check www.snowlineschools.com/purchasing for all addendums. All eligible and non-eligible items must be identified on the Bid Forms. A list of Eligible items can be found here: https://apps.fcc.gov/edocs_public/attachmatch/DA-16-1023A1.pdf

Bid Recap will be provided after a Notice of Intent to Award has been issued.

E-Rate Budget for Project:

Vista Verde Elementary School - \$59,280.00
Heritage School - \$85,760.00

Camera Count & Locations – Maps are attached to the Addendum.

IDF Maps for Vista Verde Elementary & Heritage are attached.

New Access Point Installation Count (Estimated)

Vista Verde Elementary 24 New Access Points to be Installed
Heritage 16 New Access Points to be Installed

Job-Walk Sign-In Sheet is attached.

Note: Carefully read the Scope of Work/Specifications with special attention to bulleted items. Many of the questions on the job-walk were addressed in the Scope of Work/Specification section of the RFP and will not be addressed within this addendum. However, if we felt further clarification was necessary, additional information is provided below.

The District asks all Contractors' bids to contain and honor the requested materials as specified within the RFP Scope of Work/Specifications.

INFORMATION PERTAINING TO BOTH SITES

1. Contractor can order product in April 2019. School is out at the end of May, 2019. Work to commence on June 3rd, 2019 and must be completed by July 31, 2019.
2. It is important as stated in the Scope of Work/Technical Specification bullet 'R', that all ancillary systems relying on the data distribution cabling must stay online. **Any systems**

accidentally disconnected must be reconnected immediately at no cost to the District.

3. **Important** - As stated in the Scope of Work/Technical Specifications bullet 'Q', that existing wireless access points and cameras be re-connected to the network immediately after work has been completed in each area. Access points may be existing and/or new installation.
4. Office/Admin areas of each site must be the priority for work & reconnection. Office staff work through the month of June. Make Office/Admin areas priority on the 1st of July.
5. Cameras cannot be offline for more than a 24-hour period.
6. Project pays day wages, no second shift. However, we can provide access after-hours if the contractor requests it.
7. Cabling Footage: Vista Verde Elementary - 69,954ft Heritage – 54,662ft. Cabling footage is an estimate. The Job-walk gave the Contractors ample discovery opportunities to determine if the estimates were accurate enough to bid accordingly. The Contractor is responsible for identifying where additional cabling is required.
8. No Cable Management; We prefer Short Patch Panels.
9. Fiber is not a part of this RFP.
10. Use existing drops where possible and use blank wall plate if no drops required.
11. Ceiling drops to terminate at keystone jack. Coil above tiles.
12. Re-Use wire mold raceway where possible.
13. Install new raceway where needed.
14. Contractor to provide all patch panels and patch cables based on the drop count per IDF.
15. Sleeves are required for all IDF's from cabinet to above ceiling.
16. If passing through drywall, sleeve must be fire rated.
17. Contractor may use old cabling as pull string.
18. Contractor will be responsible for additional patch cables to connect access points and security cameras.
19. The District will dispose of the old cabling.
20. **Fax Lines** – Contractor to identify correct network lines and only remove those per the project. Fax and other data/power lines are not to be removed.
21. **Cabling above Ceiling** – Please refer to Item 'F' in the provided Scope of Work/Technical Specification section of this RFP.
22. **Underground Cabling** - The District requests the 6a F/UTP Plenum Rated Cabling to be used in all underground conduit.
23. **Jack Color** – Light Blue (Same for all sites)
24. **Covers and Molding Color** – Office White (Same for all sites)
25. **Wi-Fi Connections** – Please refer to the spreadsheet for actual drop counts in rooms. The maps are provided as **supplements for wall locations only**. Most rooms will have 3 drops located above the ceiling center, but this number will vary per room.
26. **Cabling Manufacturer** – A particular Brand has not been specified. However, the District does call out in the RFP, under the **Objective** section, CAT 6a Plenum rated F/UTP. The solution must be a single manufacturer solution.

27. **Cable Circumference** – Conduit fill must be a consideration when choosing the cable diameter.
28. **Warranty** – Contractor and Manufacturer shall certify the cable plant and issue a warranty for a minimum of twenty-five (25) years.

SITE SPECIFIC INFORMATION

HERITAGE

- A. Library MDF – The District will not be replacing this switch. Install patch panel near switch.
- B. Library MDF – The District will move the cabinet into the Electrical Room outside the Library. Electrical room is not temperature controlled. Installing A/C is not a part of the S.O.W.
- C. Pathway between the Office and the Library will be needed– seal type 1-2” or 1-1/2”.
- D. The pathways at the back of the portables are part of S.O.W.
- E. Room 7 – IDF Modular patch panel is ground bus bar, just ground to cabinet.
- F. Only require patch for the MDF/IDF side. Patch cable required for cameras (CAT6a) per spec., will need to be mounted.
- G. Room 28 – Lower the drop height to the standard height used elsewhere. Ceiling drops to terminate at the biscuit above the ceiling and label. Center in the room and label at the T-Bar.
- H. County Rooms/Building - Included in Scope of Work and identified on Drop Map.


VISTA VERDE

- A. Office IDF in Electrical Room – We are not replacing the cabinet.
- B. There is a mixture of underground and above ground conduit paths. The portables have underground conduit and loops between the buildings from the IDF.
- C. Pathways – Contractors can go through above or underground.
- D. Room 18 MDF – Ceiling Drops at center of room, terminate at the biscuit and label. Contractor is responsible for relocating the Access Point to the center of the room by the drop.
- E. County Rooms – Room 5 & 7 – Included in Scope of Work and identified on Drop Map.


Vista Verde Elementary

32 Rooms

IDF RM11

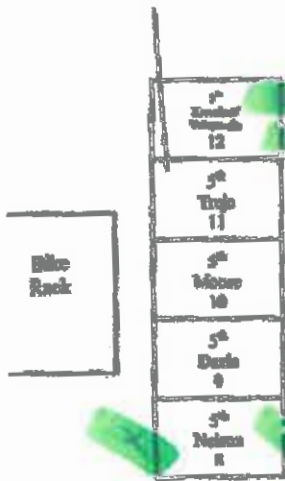


IDF RM15

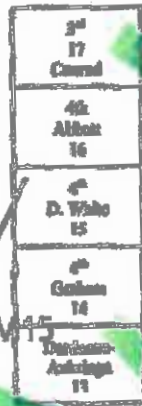

MDF LAB18



IDF RM32

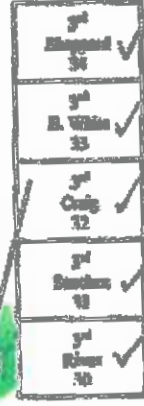


IDF RM39




IDF COUNTY



IDF RM22

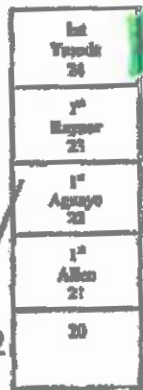

IDF RM27

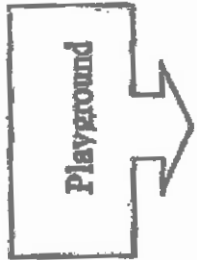

Snack Area



IDF RM44



IDF Preschool




IDF Cafeteria

IDF Office

IDF KINDERGARTEN



SNOWLINE SCHOOL BUS FACILITY.

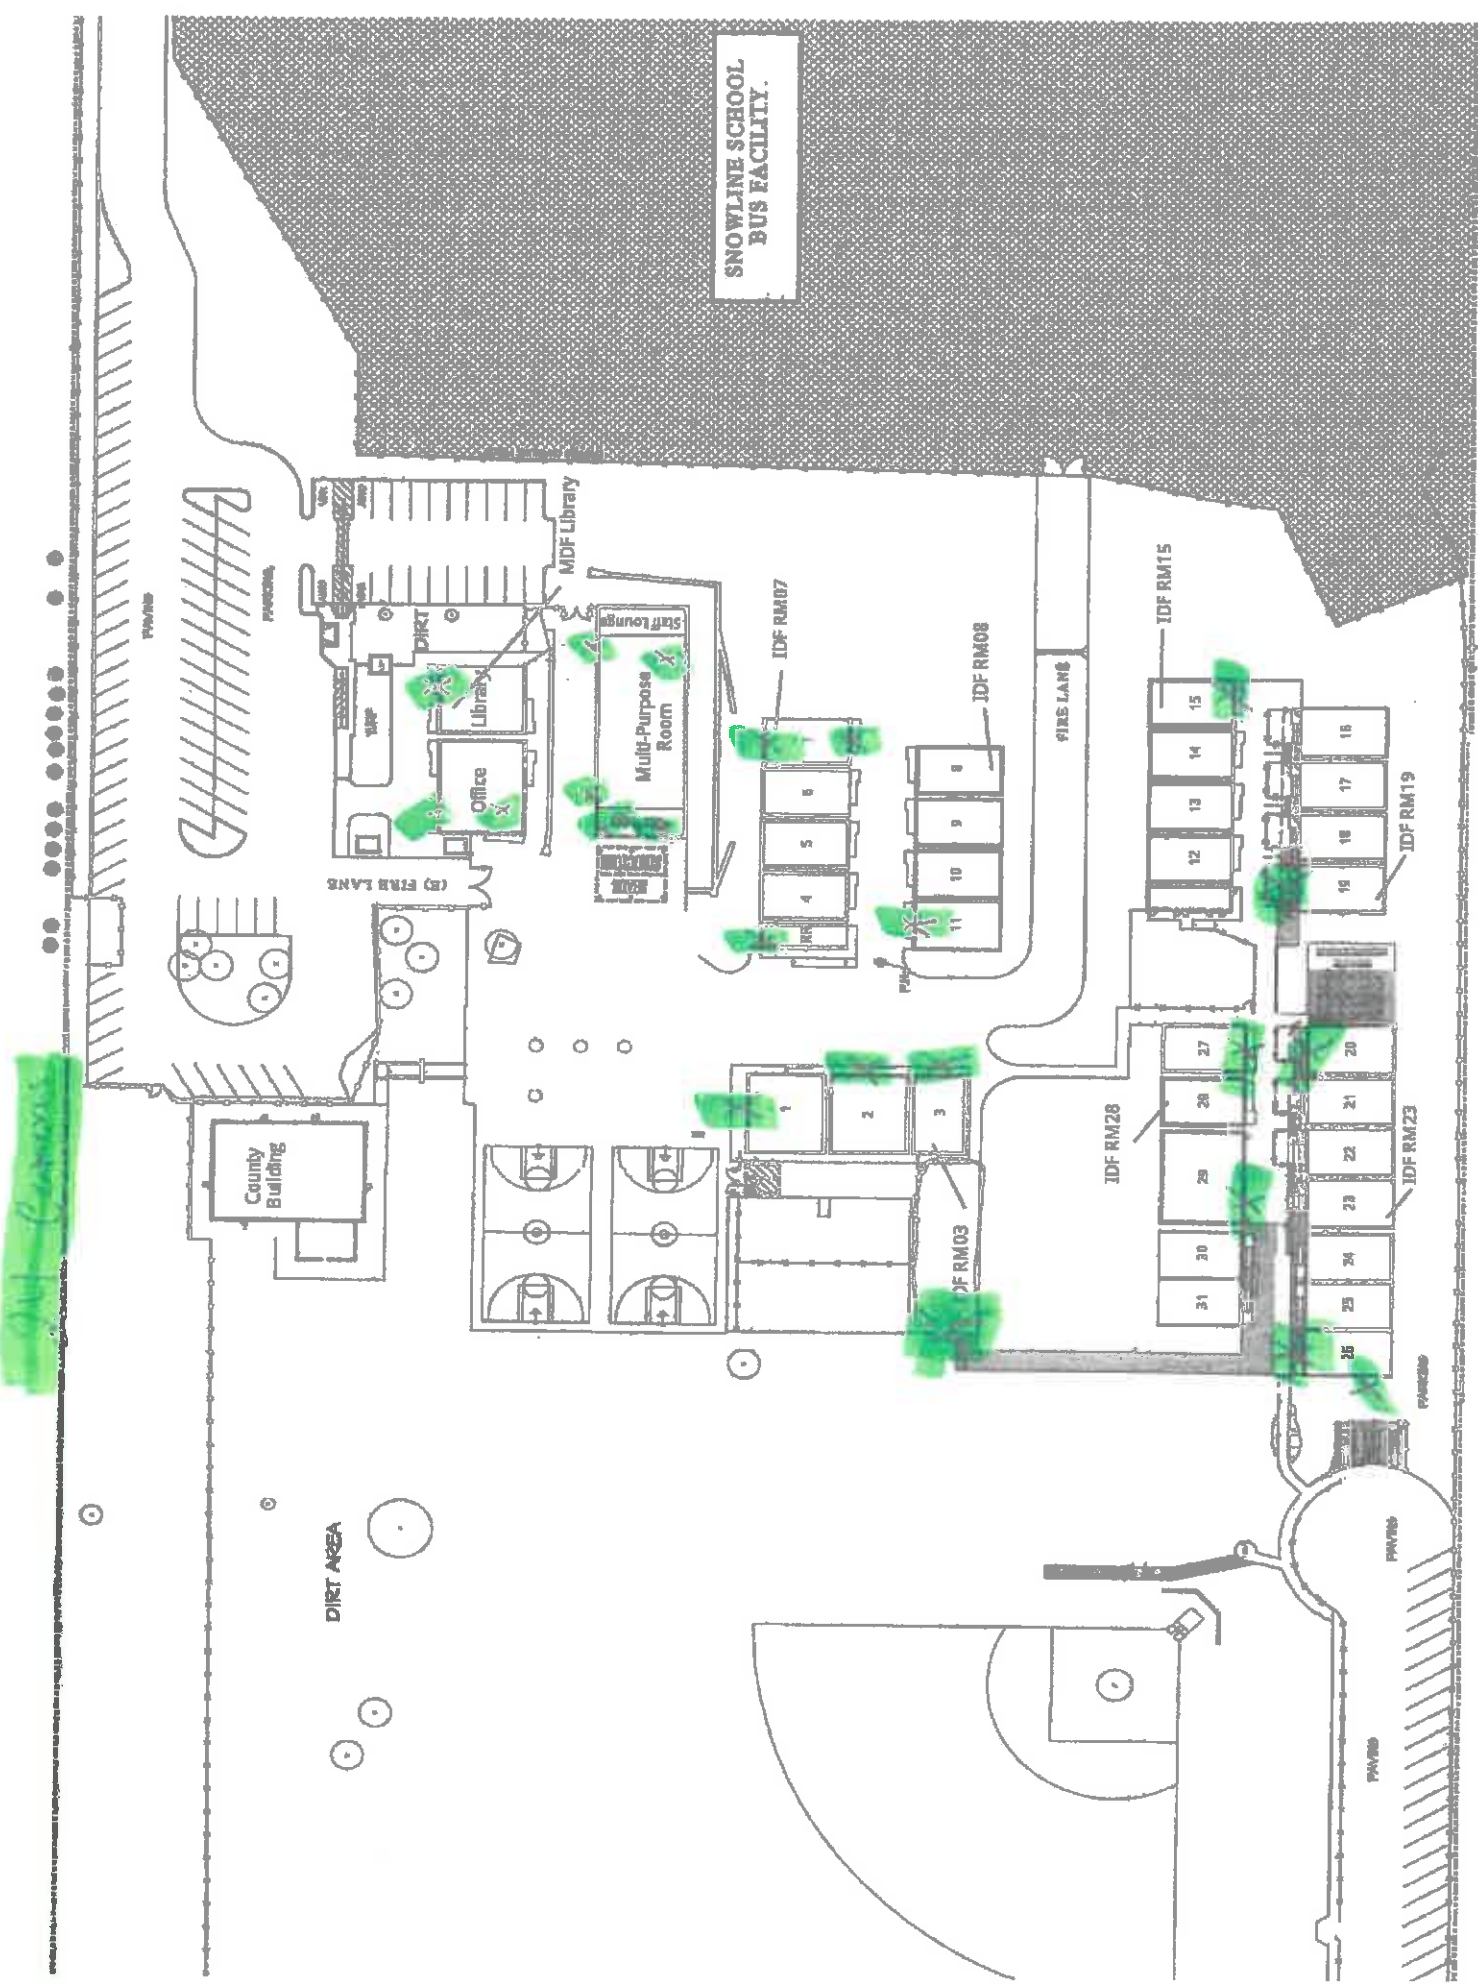


Vista Verde Elementary School

Snowline JUSD

13403 Vista Verde Street

Victorville, CA 92392










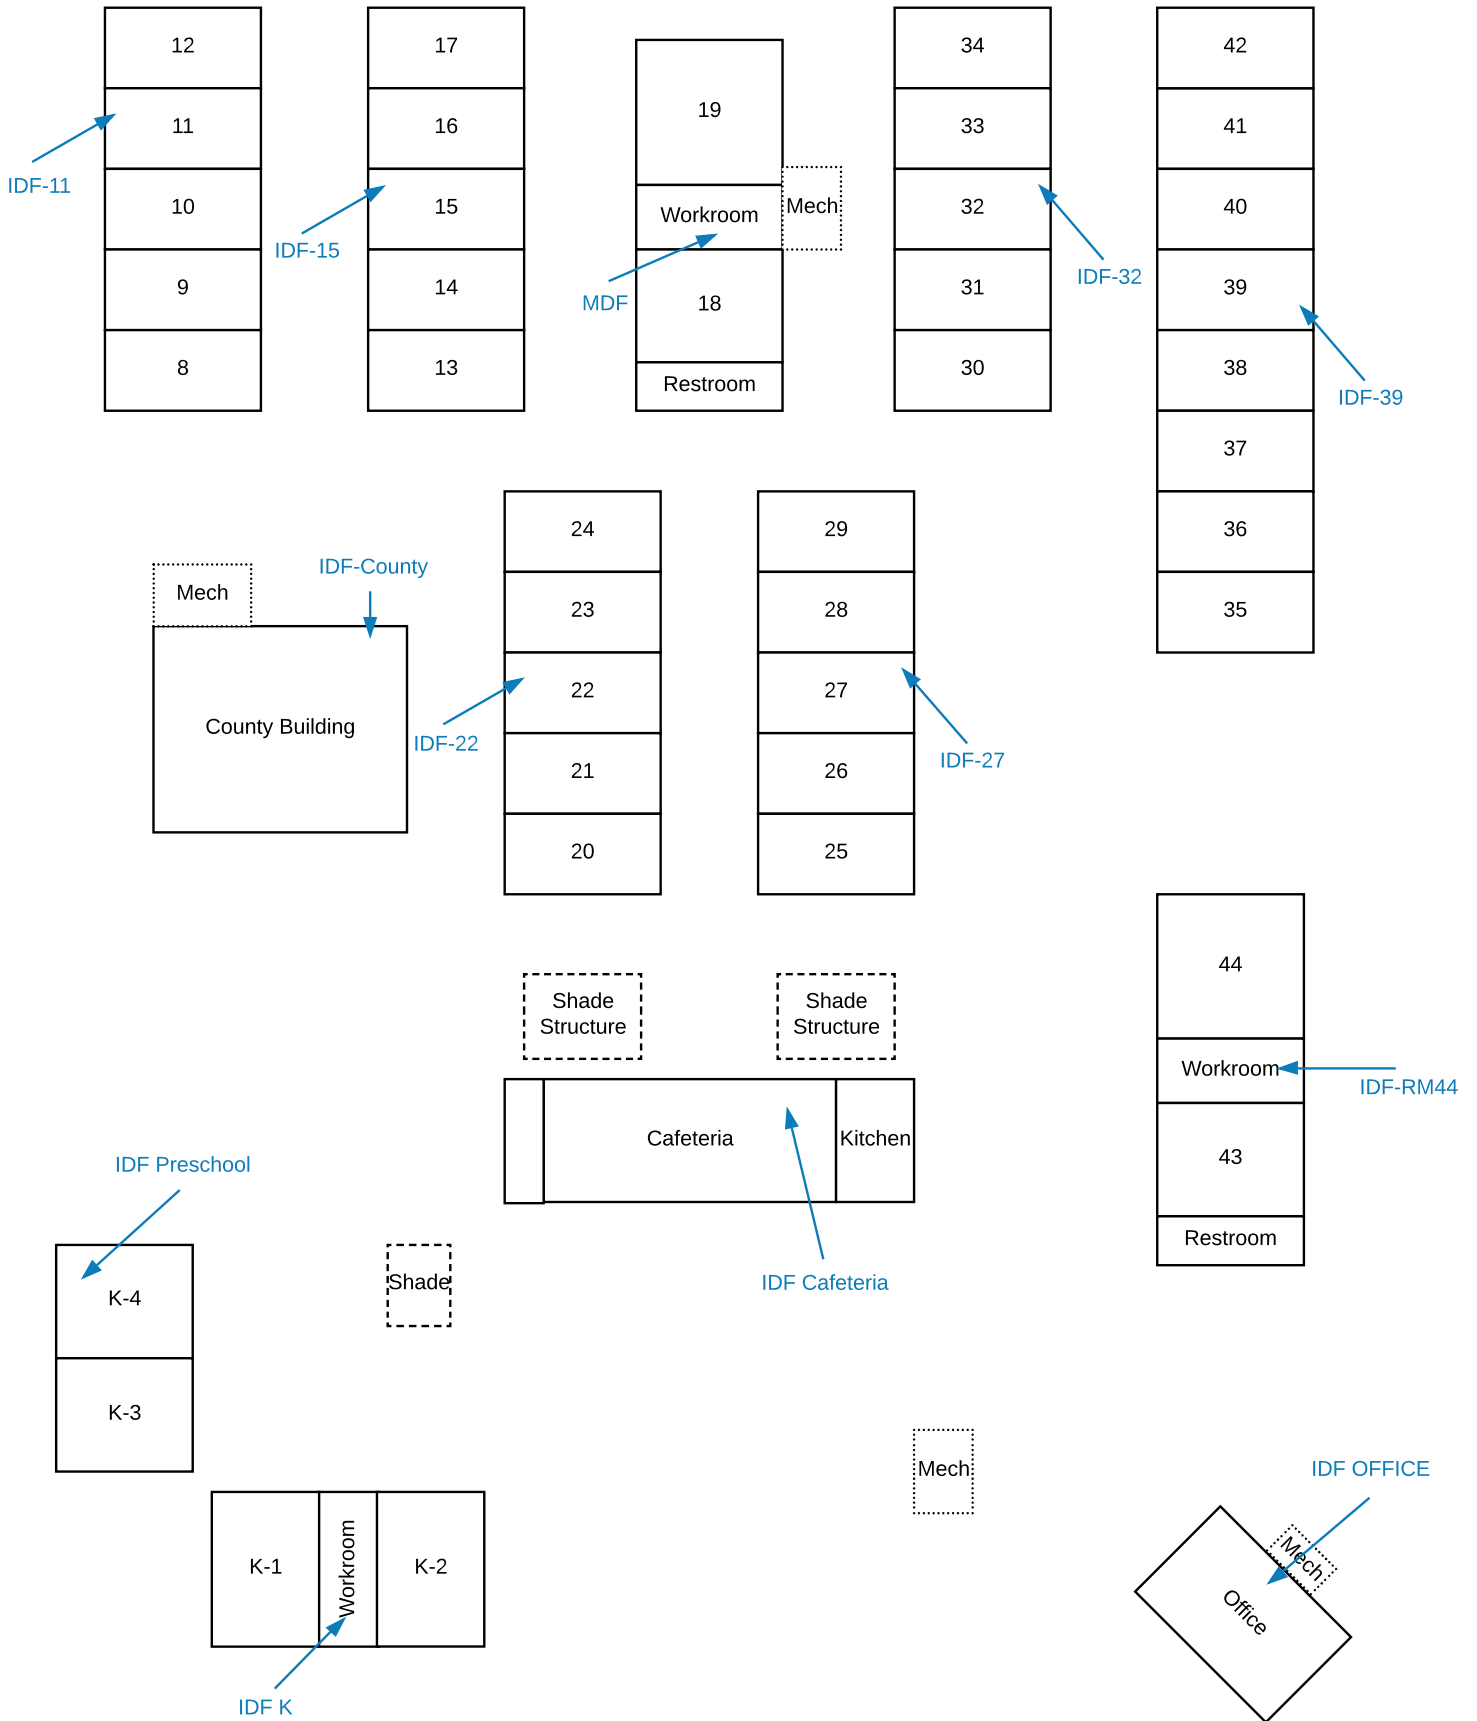


The Heritage School

Snowline JUSD

9542 Wilson Ranch Road

Phelan, CA 92371

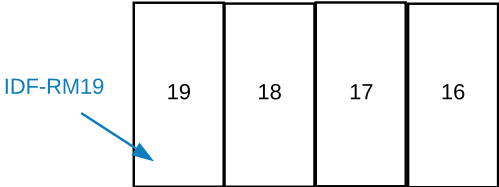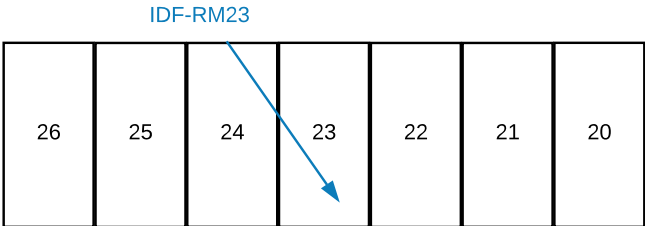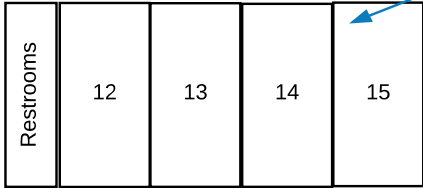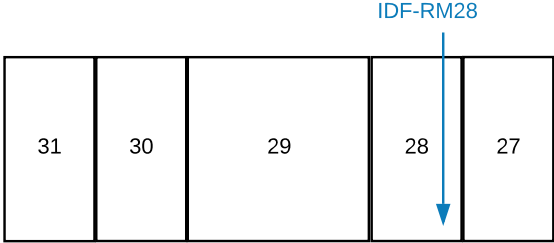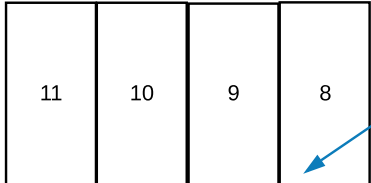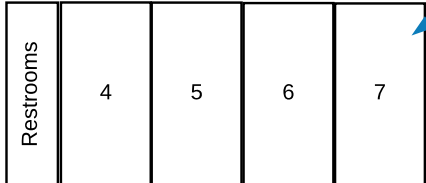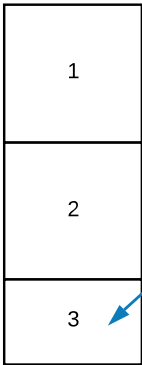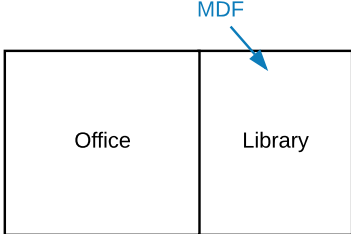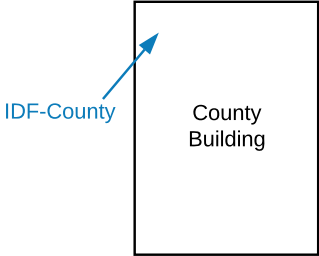

Elementary & Heritage
MANDATORY JOB-WALK 11/19/2018 @ 7:30am

Appendix Post

ATTENDANCE LIST

ATTACH BUSINESS CARD

SIGN-IN SHEET

CHECK ONE

COMPANY	CONTACT NAME & EMAIL	ADDRESS	PHONE	FAX	G.C.	SUB
Extenda Networks	Ronak Vixadia info@teamextend.com	VAN NUYS CA 91405	818 257 7110	818 257 7091		
APPLE VALLEY COMMUNICATIONS	Robert J. Amato	21845 JLS Hwy 79 APPLE VALLEY, CA 92307	760-247-2668			
Gigamon	DAVID HOPKINS ERATE@Gigamon.com	3615 KEARNY VILLA Rd. STE 201 SAN DIEGO, CA 92123	858 769 5408	858 565 2453		
XACT Technology Solutions	Ed Coleman	1920 Hillhurst Ave Los Angeles	818 465 6725	818 922 8520		
FTSI	John Pinelo JohnP@Federal.com	1828 Railroad Jct Corona, CA	951-840-0765	951-808-9700		
AAA Network Solutions	Robert Solorzano rsolorzano@aaaansi.com	2401 Page St, Buena Park, CA 90621	714-484-2711			
Easy Networks Cabling	Gerardo Morales gmorales@enetca.com	1777 - Norwin Dr. Riverside, CA 92503	951-742-8119	951-742-8125		
GATS	adriane.navarro @ gatechservices.com Leo.Ramirez @ gatechservices.com	4224 W. 9th st upland	909 981-8600	909 382-9897		
Sky TSI	nathan Huph	1761 W. Lincoln Ave	949 731			
Netxperts	Rxon Marr Rmarr@Netxperts.com	2131 S. Grove Ave Ontario CA 91761	714 909 313 5860	925 806 0899		